



Push Pads

Activation

Durable & Attractive Stainless Steel Push Pads



Elegant, vandal-resistant wireless and hardwired push pads designed to facilitate disabled pedestrian access to all public buildings



TAMPER RESISTANT

Manufactured from high grade stainless steel and assembled without visible fixings ensuring a tamper resistant push pad

WIRELESS FOR EASE OF INSTALLATION


Can be radio-controlled with the addition of an optional miniature remote control transmitter and receiver

DURABLE

Tested to in excess of 10 million activation cycles our range of switches offer low maintenance combined with elegance

AVAILABLE IN A RANGE OF SIZES

6" (152mm) Square
4.5" (115mm) Square
4.5" x 1.5" (115 x 38mm) Jamb Style

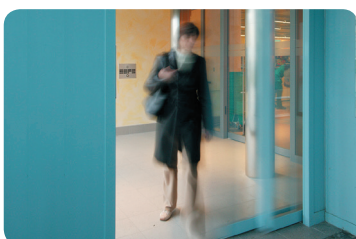

www.hotron.com

HOTRON

prEN 16005

Push Pads

Activation



Technical Specifications

Model	Stainless Steel Wireless + Hardwired Push Pads	
Material	18-gauge stainless steel with a brushed finish	
Power	12 VDC or 24 VDC/VAC	
Operating Temperature	-40°C to 60°C (-40°F to 140°F)	
Operating Options	Hardwired and Radio Control versions operating at 433 MHz	

	TRANSMITTER	RECEIVER
Frequency	433.92 MHz	433.92 MHz
Dimensions	31x22x6mm (1.25"x0.875"x0.25")	57x32x19mm (2.25"x 1.25"x 0.75")
Security Code Method	Code Hopping	Code Hopping
Battery Life	60,000 cycles	Can learn up to 12 different transmitters
Operating Temperature Range	-20°C to +55°C (-4°F to +122°F)	-20°C to +55°C (-4°F to +122°F)
Electrical Rating	-	100,000 cycles at 2 Amps at either 24 VDC or 120 VAC
Input Power	24 VAC, 24VDC or 12 VDC	24 VAC, 24VDC or 12 VDC
Relay Output	-	1 NO 1 NC
Signal Range	150ft (45m)	-

Associated Accessories



Recess mounting kit
for 4S1U0 and 4S1U4
4UFK

Range Available

Hardwired Jamb Box Push Plate
4.5" x 1.5" (115 x 38mm)
J01J0




Hardwired Push Pad
4.5" (115mm) square
4S1U0




Hardwired Push Pad
6" (152mm) square
6S1U0




J01J0 + 433 MHz transmitter
4.5" x 1.5" (115 x 38mm)
J01J4




4S1U0 + 433 MHz transmitter
4.5" (115mm) square
4S1U4



6S1U0 + 433 MHz transmitter
6" (152mm) square
6S1U4



Ultra-small 433MHz receiver
433MHz-RX



Ultra-small 433MHz
replacement transmitter
433MHz-TX

